

Conventional Series

GBT12-26(12V26Ah)

General-Purpose Lead-Acid Batteries

GBT series batteries are general-purpose lead-acid batteries. Adopting high quality lead-calcium multi-alloy plate grid, corrosion resistance, good mechanical properties; high-performance casting and welding plates, conductivity is 30% higher than ordinary batteries internal mechanical through-wall welding, internal resistance is reduced by 20%, more adaptable to high-current discharging; AGM technology, so that the battery has a higher energy density, charging acceptance is stronger; imports of ABS raw materials, homemade shell, the use of heat sealing process, so that the battery becomes an integrated whole, sealing is greatly improved; pure copper downward rotating terminals, not only to meet the needs of high-current charging and discharging, and flexible installation and maintenance. Pure copper downward rotating terminals not only meet the needs of high-current charging and discharging, but also flexible installation and more convenient maintenance. This series of batteries are manufactured by international advanced automatic production line, with high stability and consistency of batteries and longer service life. The product meets the standards of TLC, GB/T19638.1-2014, etc., and the design life is up to 12 years (25°C).

Applications

- * Uninterruptible Power Supply (UPS)
- * Data Center (IDC)
- * Government and Enterprise Unit (GEU) server rooms
- * Bank Backup Power
- * Fire Fighting Power Supply (EPS)
- * Telecommunications communication systems
- * Alarm and security systems
- * Solar wind energy systems
- * DC panel power supply
- * Power Systems

Material Composition

- * Safety Exhaust Valve EPDM
- * Positive plate lead dioxide
- * Negative plate sponge lead
- * electrolytes sulfuric acid
- * Partitions fiberglass wool
- * Terminals copper
- * Housing ABS material flame retardant UL94-HB
- UL94-V0

Product Advantage

- * Low self-discharge
- * Highly airtight
- * Consistency
- * maintenance-free without the need to add water
- * with a design life of up to 12 years
- * High safety performance, explosion-proof and flame retardant
- * Low internal resistance and excellent conductivity
- * excellent high rate discharge performance


Specification

Breakdown

Battery type	Rated voltage		12V	
	Nominal Capacity (10HR)		24Ah	
	Battery type		6-GFM-24	
Battery size	Long	Wide	High	Overall height (including terminals)
	165mm (6.49 inches)	126mm (4.96 inches)	173mm (6.81 inches)	173mm (6.81 inches)
Approximate weight	7.50kg (16.53lbs) ± 3%			
Capacity	20 hour rate (10.5V)	10 hour rate (10.8V)	5-hour rate (10.5V)	1 hour rate (9.6V)
	26.2Ah	24Ah	21.5Ah	16.0Ah
Maximum discharge current	360A (5 seconds)			
Battery internal resistance	Approx. 13.20mΩ at full power (25°C)			
capacity under the influence of temperature	40°C (104 °F)	25°C (77 °F)	0°C (32 °F)	-15°C (5 °F)
	102%	100%	85%	65%
Self-discharge @25°C (77 °F)	stored for one month		three months of storage	Storage for twelve months
	98%		94%	74%
Charging Method @25°C (77 °F)	Recycling		Float-charged use	
	14.40-15.00V (initial charging current less than 7.2A)		13.50-13.80V	

Dimensional data (mm)


Terminal Type (mm)

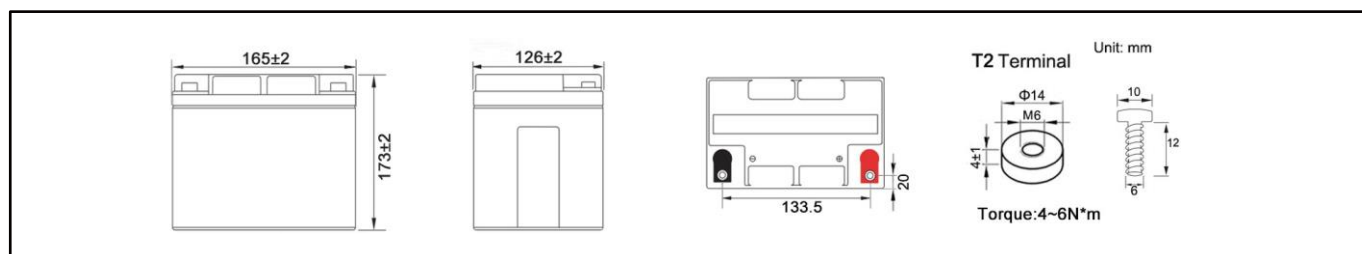


Constant Current and Constant Power Discharge Meter (25°C)

F.V\TIME		5MIN	15MIN	30MIN	60MIN	2 HR	3 HR	5HR	8HR	10HR	20HR
1.60V/cell	A	90.000	46.000	27.600	16.000	9.200	6.790	4.460	3.050	2.520	1.350
	W	161.000	85.500	52.500	30.500	17.620	13.080	8.670	5.950	4.940	2.680
1.67V/cell	A	84.000	44.200	26.900	15.700	9.070	6.680	4.400	3.000	2.480	1.330
	W	151.000	82.300	51.400	30.100	17.430	12.950	8.570	5.870	4.880	2.660
1.70V/cell	A	81.000	43.500	26.500	15.500	8.980	6.610	4.360	2.980	2.460	1.320
	W	147.000	81.200	50.800	29.900	17.310	12.840	8.510	5.840	4.850	2.650
1.75V/cell	A	75.000	42.400	26.000	15.200	8.850	6.520	4.300	2.940	2.430	1.310
	W	138.000	79.200	49.500	29.400	17.090	12.720	8.420	5.780	4.810	2.620
1.80V/cell	A	69.000	40.500	25.200	14.800	8.690	6.450	4.250	2.900	2.400	1.290
	W	129.000	76.200	48.600	28.700	16.880	12.590	8.330	5.720	4.780	2.600


放电特性曲线图 (25°C/77°F)

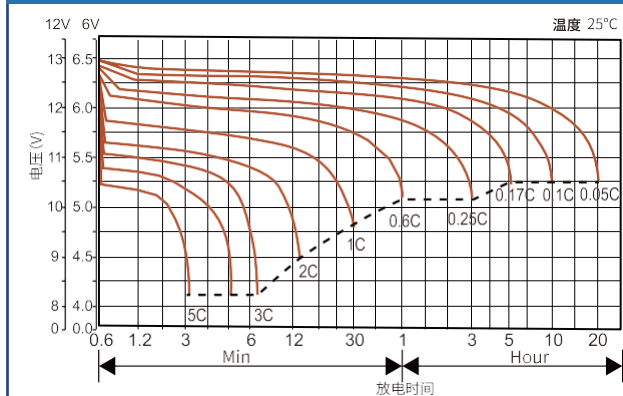


浮充充电特性曲线图 (25°C/77°F)

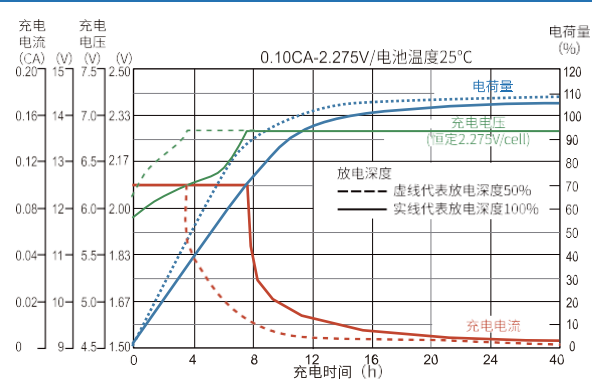


循环寿命与放电深度

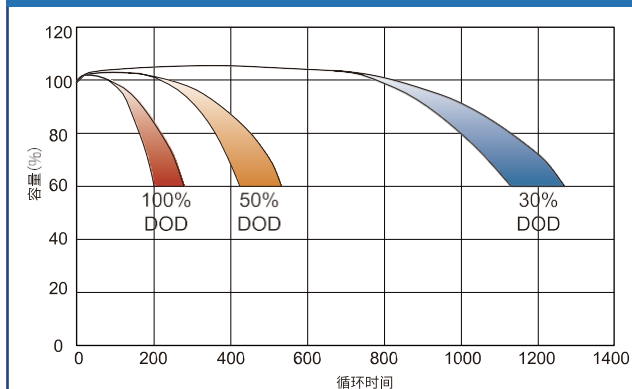


循环充电特性曲线图 (25°C/77°F)

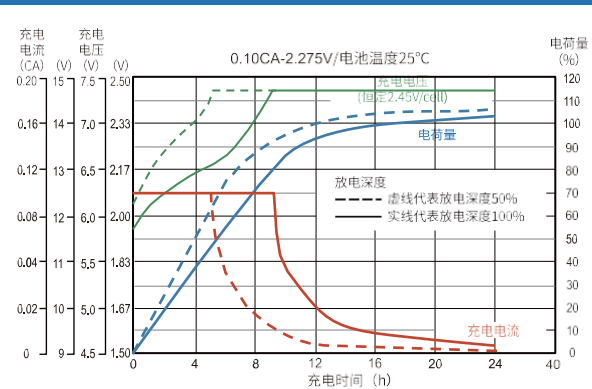


温度与容量之间的关系

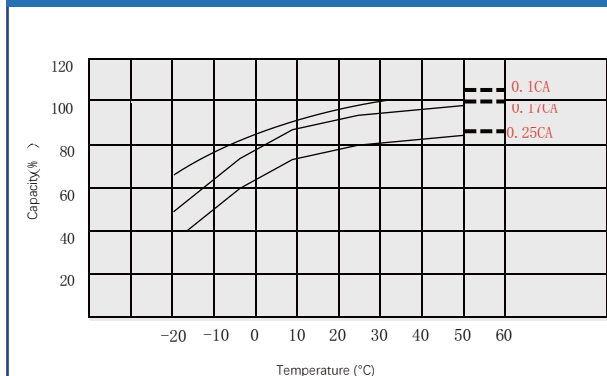

充电电压与温度的关系

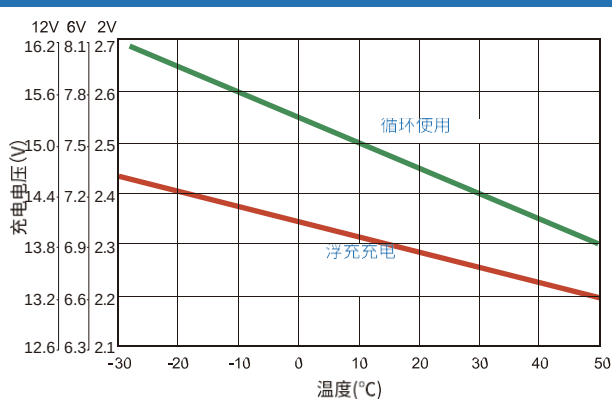

自放电特性

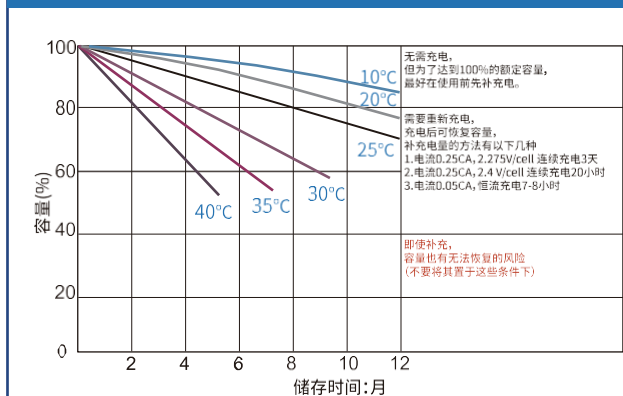

温度与浮充寿命

